

PROLONGACIONES REGULABLES (ADJUSTABLE EXTENSION LINKS)

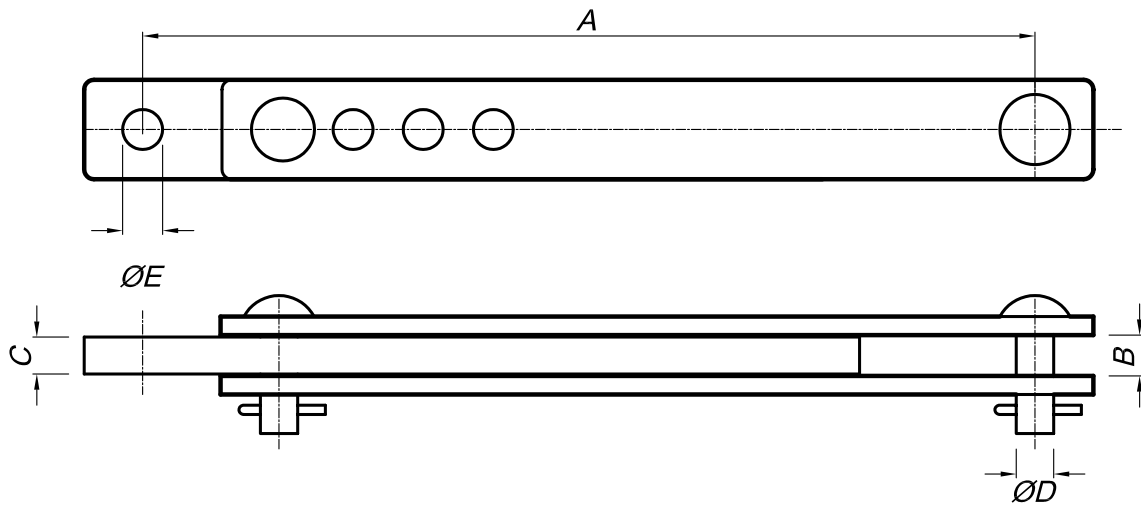


Fig.1

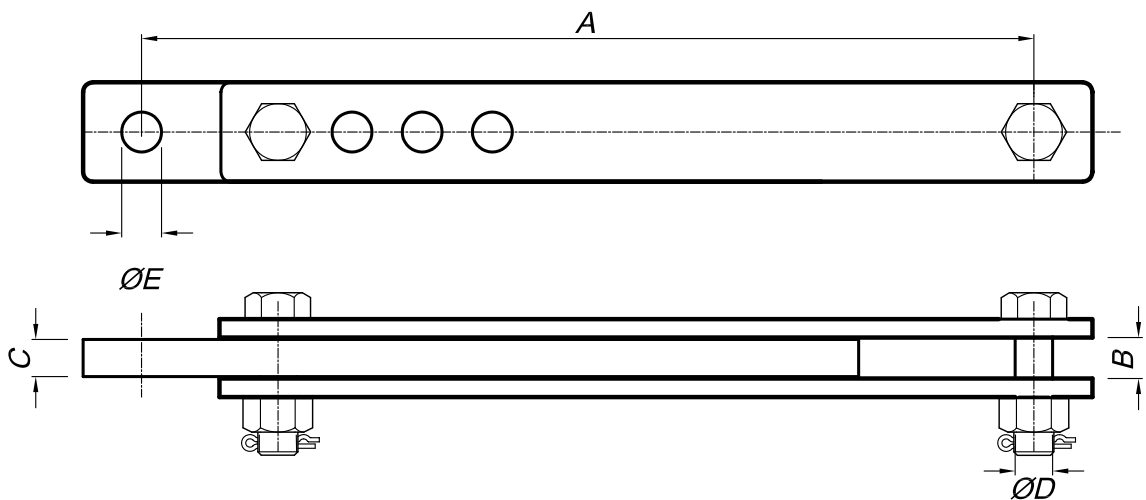


Fig.2

Modelo (Model)	Dimensiones (Dimensions) mm						Carga min. de rotura (Min. breaking strength) kN
	A	B	C	ØD	E	Fig.	
PR-1	550/850	18	16	19	21	1	90
PR-2	410/650	18	16	19	21	1	90
PR-3	550/850	21	19	19	21	2	160
PR-5	410/610	18	16	16	18	1	80
PR-6	250/370	18	16	16	18	1	80
PR-7	320/520	18	16	16	18	1	80
PR-1B	550/850	18	16	19	21	2	140
PR-2B	420/700	18	16	19	21	2	140
PR-5B	410/610	18	16	19	21	2	120
PR-6B	250/370	18	16	16	18	2	100
PR-7B	320/520	18	16	16	18	2	120